


Transport trolley JLA-e 15/30 G with stroke facelift

The electric-powered transport trolley JLA-e 15/30 G is easy to operate and does not require an additional towing vehicle. Stroke of 50 mm and suitable for loads up to 30 tons.

Product number 22 015 210-G hub

Weight 380kg

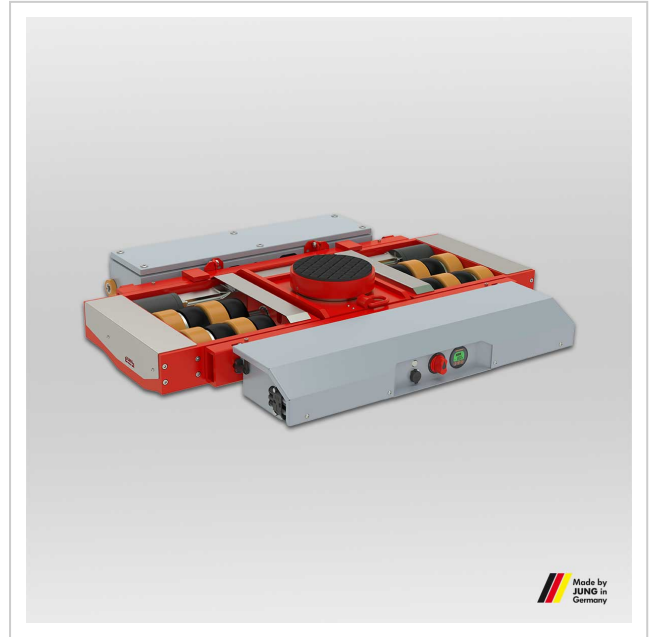

Product description


Advantages of the electric-powered transport trolleys JLA-e 15/30 G with stroke

- Maximum stroke of 50 mm.
- The load can be moved when fully extended.
- No separate towing vehicle is required.
- Compact and practical, with battery operation and a user-friendly wireless remote control. Based on 2.4 GHz technology, equipped with a wired connection socket, allowing for one- or two-handed operation, vibration feedback, and other features.
- Long runtime (under full load in ideal conditions) of approximately 4-5 hours due to a direct-drive motor.
- The new generation of drives prevents rolling, even when powered off.
- The new battery display shows various parameters in real time, such as voltage, current, or charge status.
- Short charging time for the self-propelled transport unit JLA-e 15/30 G.
- Rotatable by 360°.
- Stepless speed control.
- Compact external dimensions.
- The electric transport trolley is compatible with the G series trolleys (adjusted installation height). These are not included in the delivery.
- The advanced LiFePo4 cell technology, with higher energy density, allows for a more compact design.
- Side cover plates with JUNG branding provide dirt protection and a visually appealing design.


Product properties

Operational time (h)	4 - 5
Dimensions (mm)	1 050 x 1 215
Weight with battery (kg)	315
Battery and charger	1 x
Speed (m/min)	6,5
Supporting surface of turnable Ø (mm)	215
Remote control, charger and belt with holder	1 x
Number of castors (Pieces)	16
Stroke (mm)	50
Castor dimensions (Ø x l mm)	140 x 59
Pulling capacity (t)	30
Height (mm)	200
Load capacity (t)	15


More images

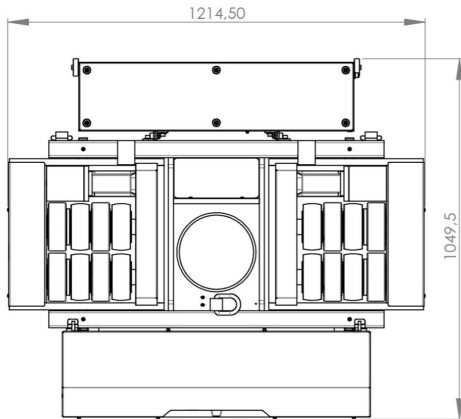

JLA-e 15/30 G Hub | Art-No. 22 015 210-G Hub| Draufsicht | Top view



JLA-e 15/30 G Hub | Art-No. 22 015 210-G Hub| Fronansicht | Front view

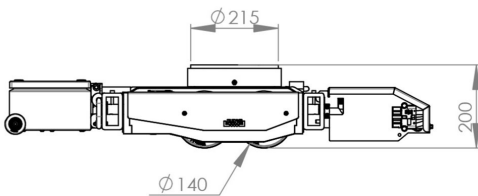

JLA-e 15/30 G Hub | Art-No. 22 015 210-G Hub| Seitenansicht | Side view

