

# Transport trolley JLA-e 15/30 facelift

The electric-powered transport trolley JLA-e 15/30 G is easy to operate and does not require an additional towing vehicle. Suitable for loads up to 30 tons.

**Product number** 22 015 200-G

**Weight** 325kg



## Product description


Advantages of The electric-powered transport trolleys JLA-e 15/30 G facelift

- There is no separate towing vehicle required.
- This device is highly practical as it comes equipped with a rechargeable battery and a handy wireless remote control. The remote operates on 2.4 GHz, features a cable connection socket, and can flexibly switch between two-hand and one-hand operation, making it suitable for both left- and right-handed users. The one-hand operation allows the cart to drive perfectly straight with ease.
- Thanks to its direct drive motor, the device boasts an impressive runtime (4-5 hours at full load under optimal conditions).
- The new generation of drives prevents rolling away, even when powered off.
- Short charging time for the self-propelled transport cart JLA-e 15/30 G with the optimized charger: 3-4 hours.
- The new battery display shows various parameters in real time, such as voltage, current, or charge level.
- It can rotate 360°.
- The transport cart features infinitely variable speed control.
- The further developed LiFePo4 cell technology with higher energy density has enabled a more compact design.
- The batteries are interchangeable with one another.
- The device is compatible with the G-series and H-series tank rollers. These transport carts are not included in the delivery.
-

## Product properties

Weight battery + box (kg)	45
Operational time (h)	4 - 5
Dimensions (mm)	835 x 1 215
Weight without battery + controller (kg)	198
Battery and charger	1 x
Speed (m/min)	6,5
Supporting surface of turnable Ø (mm)	215
Remote control, charger and belt with holder	1 x
Number of castors (Pieces)	16
Weight charger (kg)	2
Castor dimensions (Ø x l mm)	140 x 59
Height (mm)	180
Pulling capacity (t)	30
Operating mode in acc. with VDE 0530	S3 60%
Load capacity (t)	15


## More images

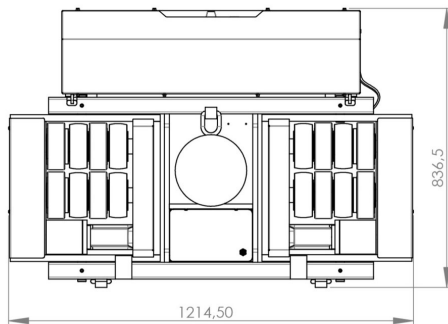

JLA-e 15/30 G | Art.No. 22 015 200-G| Draufsicht | Top view



JLA-e 15/30 G | Art.No. 22 015 200-G| Frontansicht | Front view

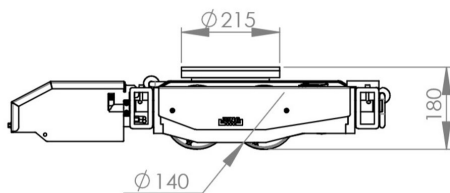

JLA-e 15/30 G | Art.No. 22 015 200-G| Seitenansicht | Side view

