


Multi-purpose trolley JLF 5

Agile and powerful multi purpose transport trolley from JUNG. The JLF 5 transport trolley transports loads up to 5 t with an installation height of 150 mm.

Product number 16 050 085-D

Weight 28kg

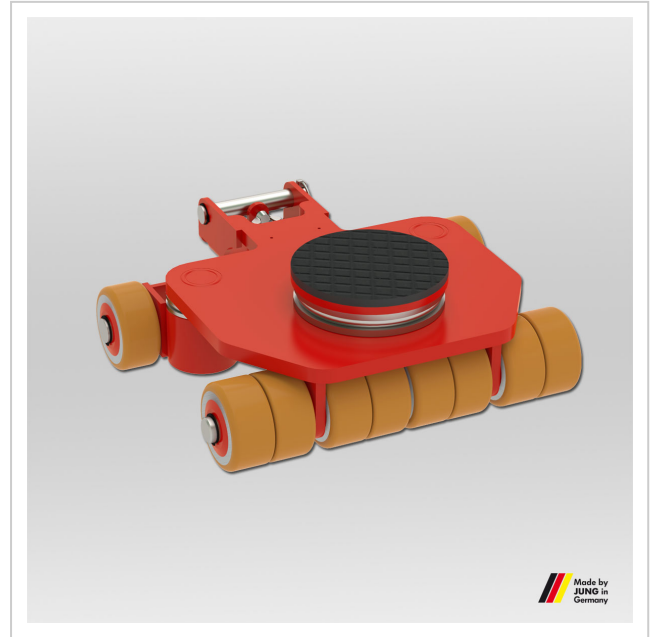

Product description

Qualities of the multi-purpose transport trolley JLF 5



- The swiveling steering rollers reduce steering force from a standstill by up to 80%. This enables ergonomic and energy-saving operation of the tank rollers by the user.
- Ergonomic: reduces handling effort for user.
- A rigid rear axle with Professional rollers (double rollers) ensures straight-line driving.
- Each trolley can be used for either steerable or straight-line movements.
- Extreme maneuverable with thrust bearing supported, anti-slip turntable.
- Trolleys can be used as steerable, adjustable or tandem trolley.
- Ideal for transporting loads on slalom paths including 90° true-to-course straightline, turning and sideways maneuvering.
- Floor protective, non-marking coating.
- Low profile. Low weight.
- Included in set is an additional pulling handle for steering of rear-trailing trolleys
- for tighter turning radius.
- Inspected according to technical regulation ANSI ? ASME (USA)

Product properties



Number of castors / twin castors (pcs.)	4/4
Castor dimensions (Ø x l mm)	85 x 43
Height (mm)	150
Weight JUWAtan@plus (kg)	28
Dimensions (mm)	410 x 420
Supporting surface of turnable Ø (mm)	150
Load capacity (t)	5

More images

Image not found or type unknown

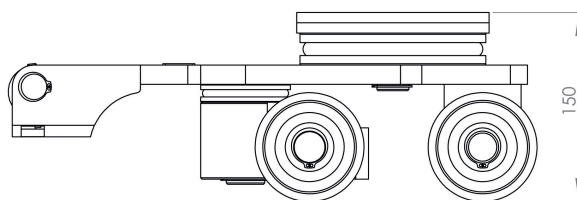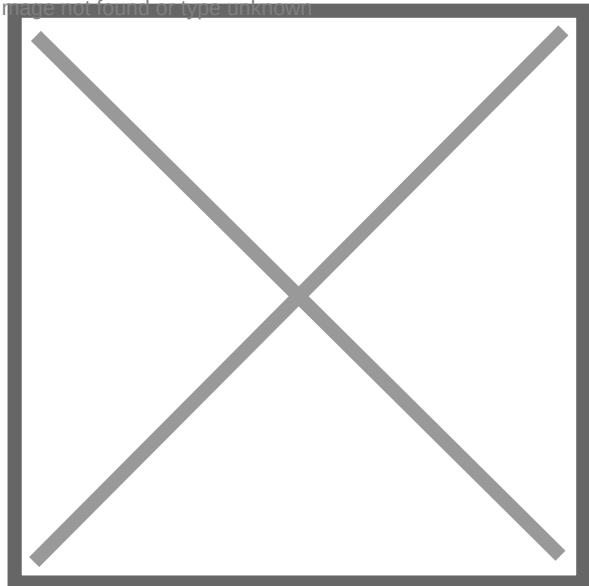


JLF 5 | Art.No. 16.050.085-D | Seitenansicht | Side view

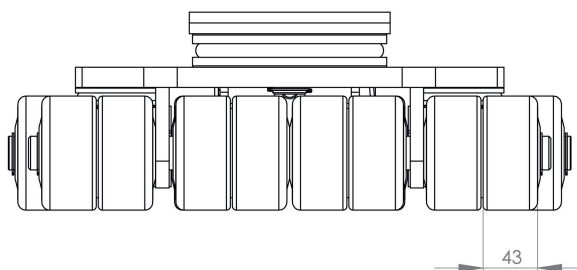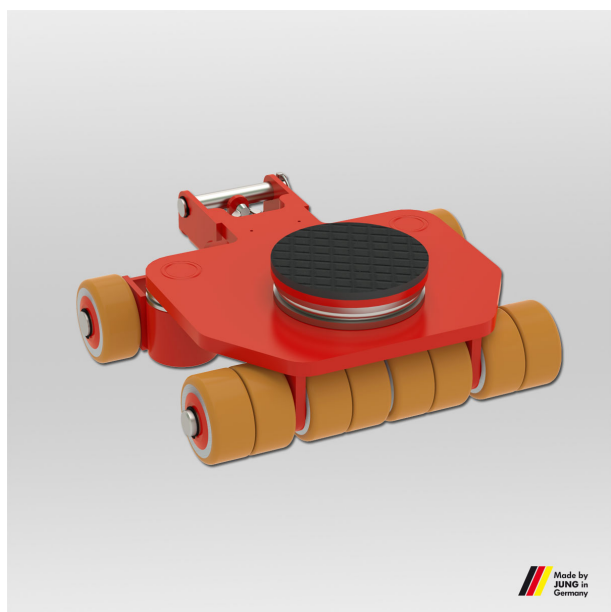

JLF 5 | Art.No. 16.050.085-D | Frontansicht | Front view

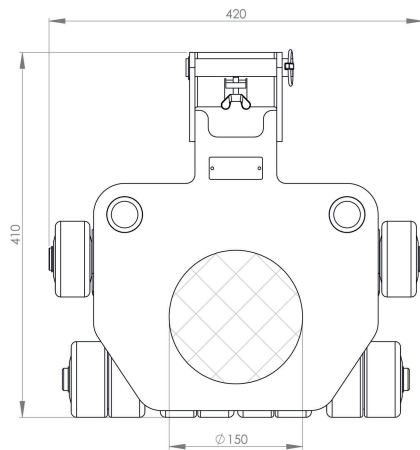

**JLF 5** | Art-No. 16 050 085-D | Draufsicht | Top view