


# Transport trolley JFB 120 H Professional - NEW

Strength meets precision - the JFB 120 H transport trolley from JUNG can lift loads of up to 120 t with an ultra-low installation height of 240 mm.

**Product number** 10 913 206-H

**Weight** 646kg

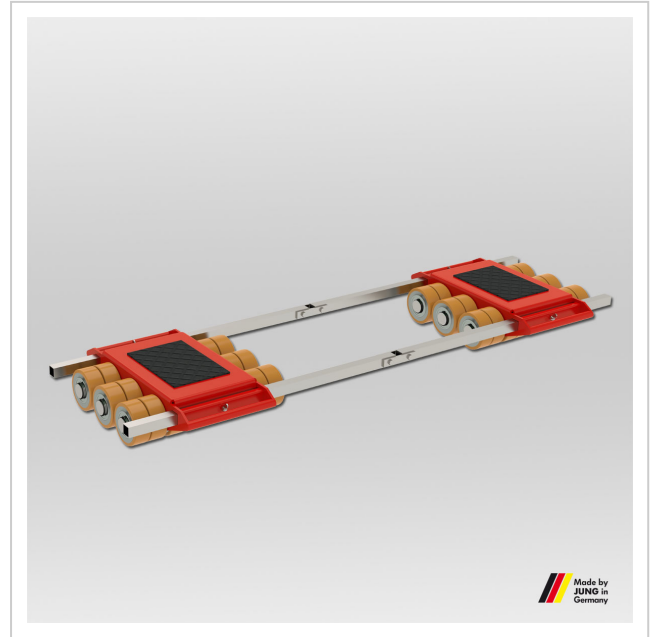

## Product description

Features of the JUNG Transport trolleys JFB 120 H Professional

- Despite their high load capacity, the transport trolleys feature a compact and weight-optimized design.
- The newly developed trolley with a reduced number of rollers enables a more compact construction without compromising load capacity – made possible by the use of advanced roller technology.
- The reduced number and optimized arrangement of rollers result in significant weight savings.
- The combination of halved roller width and doubled roller quantity significantly improves maneuverability and greatly reduces frictional forces during cornering.
- A mechanical pendulum suspension of the cassettes or axles ensures even load distribution across all rollers and the ground surface, eliminating the need for a hydraulic leveling system.
- The tank rollers are delivered fully pre-assembled and are ready for immediate use without additional installation effort.

JUNG transport trolleys are fitted with ball-bearing rollers for smooth and effortless movement. The rollers come standard with a low-wear tread.

## Product properties

|   |             |
|---|-------------|
| <b>Load capacity (suitable)</b>             | 61 - 200 t  |
| <b>Weight JUWathan® (kg)</b>                | 646         |
| <b>Cassettes adjustable from - to (mm)</b>  | 580 x 2 800 |
| <b>Number of castors (Pieces)</b>           | 2 x 18      |
| <b>Cassette dimensions (mm)</b>             | 960 x 590   |
| <b>Supporting surface per cassette (mm)</b> | 400 x 260   |
| <b>Height (mm)</b>                          | 240         |
| <b>Castor dimensions (Ø x l mm)</b>         | 200 x 85    |
| <b>Connecting bar with joint (mm)</b>       | 2 x 3 000   |

## More images

